
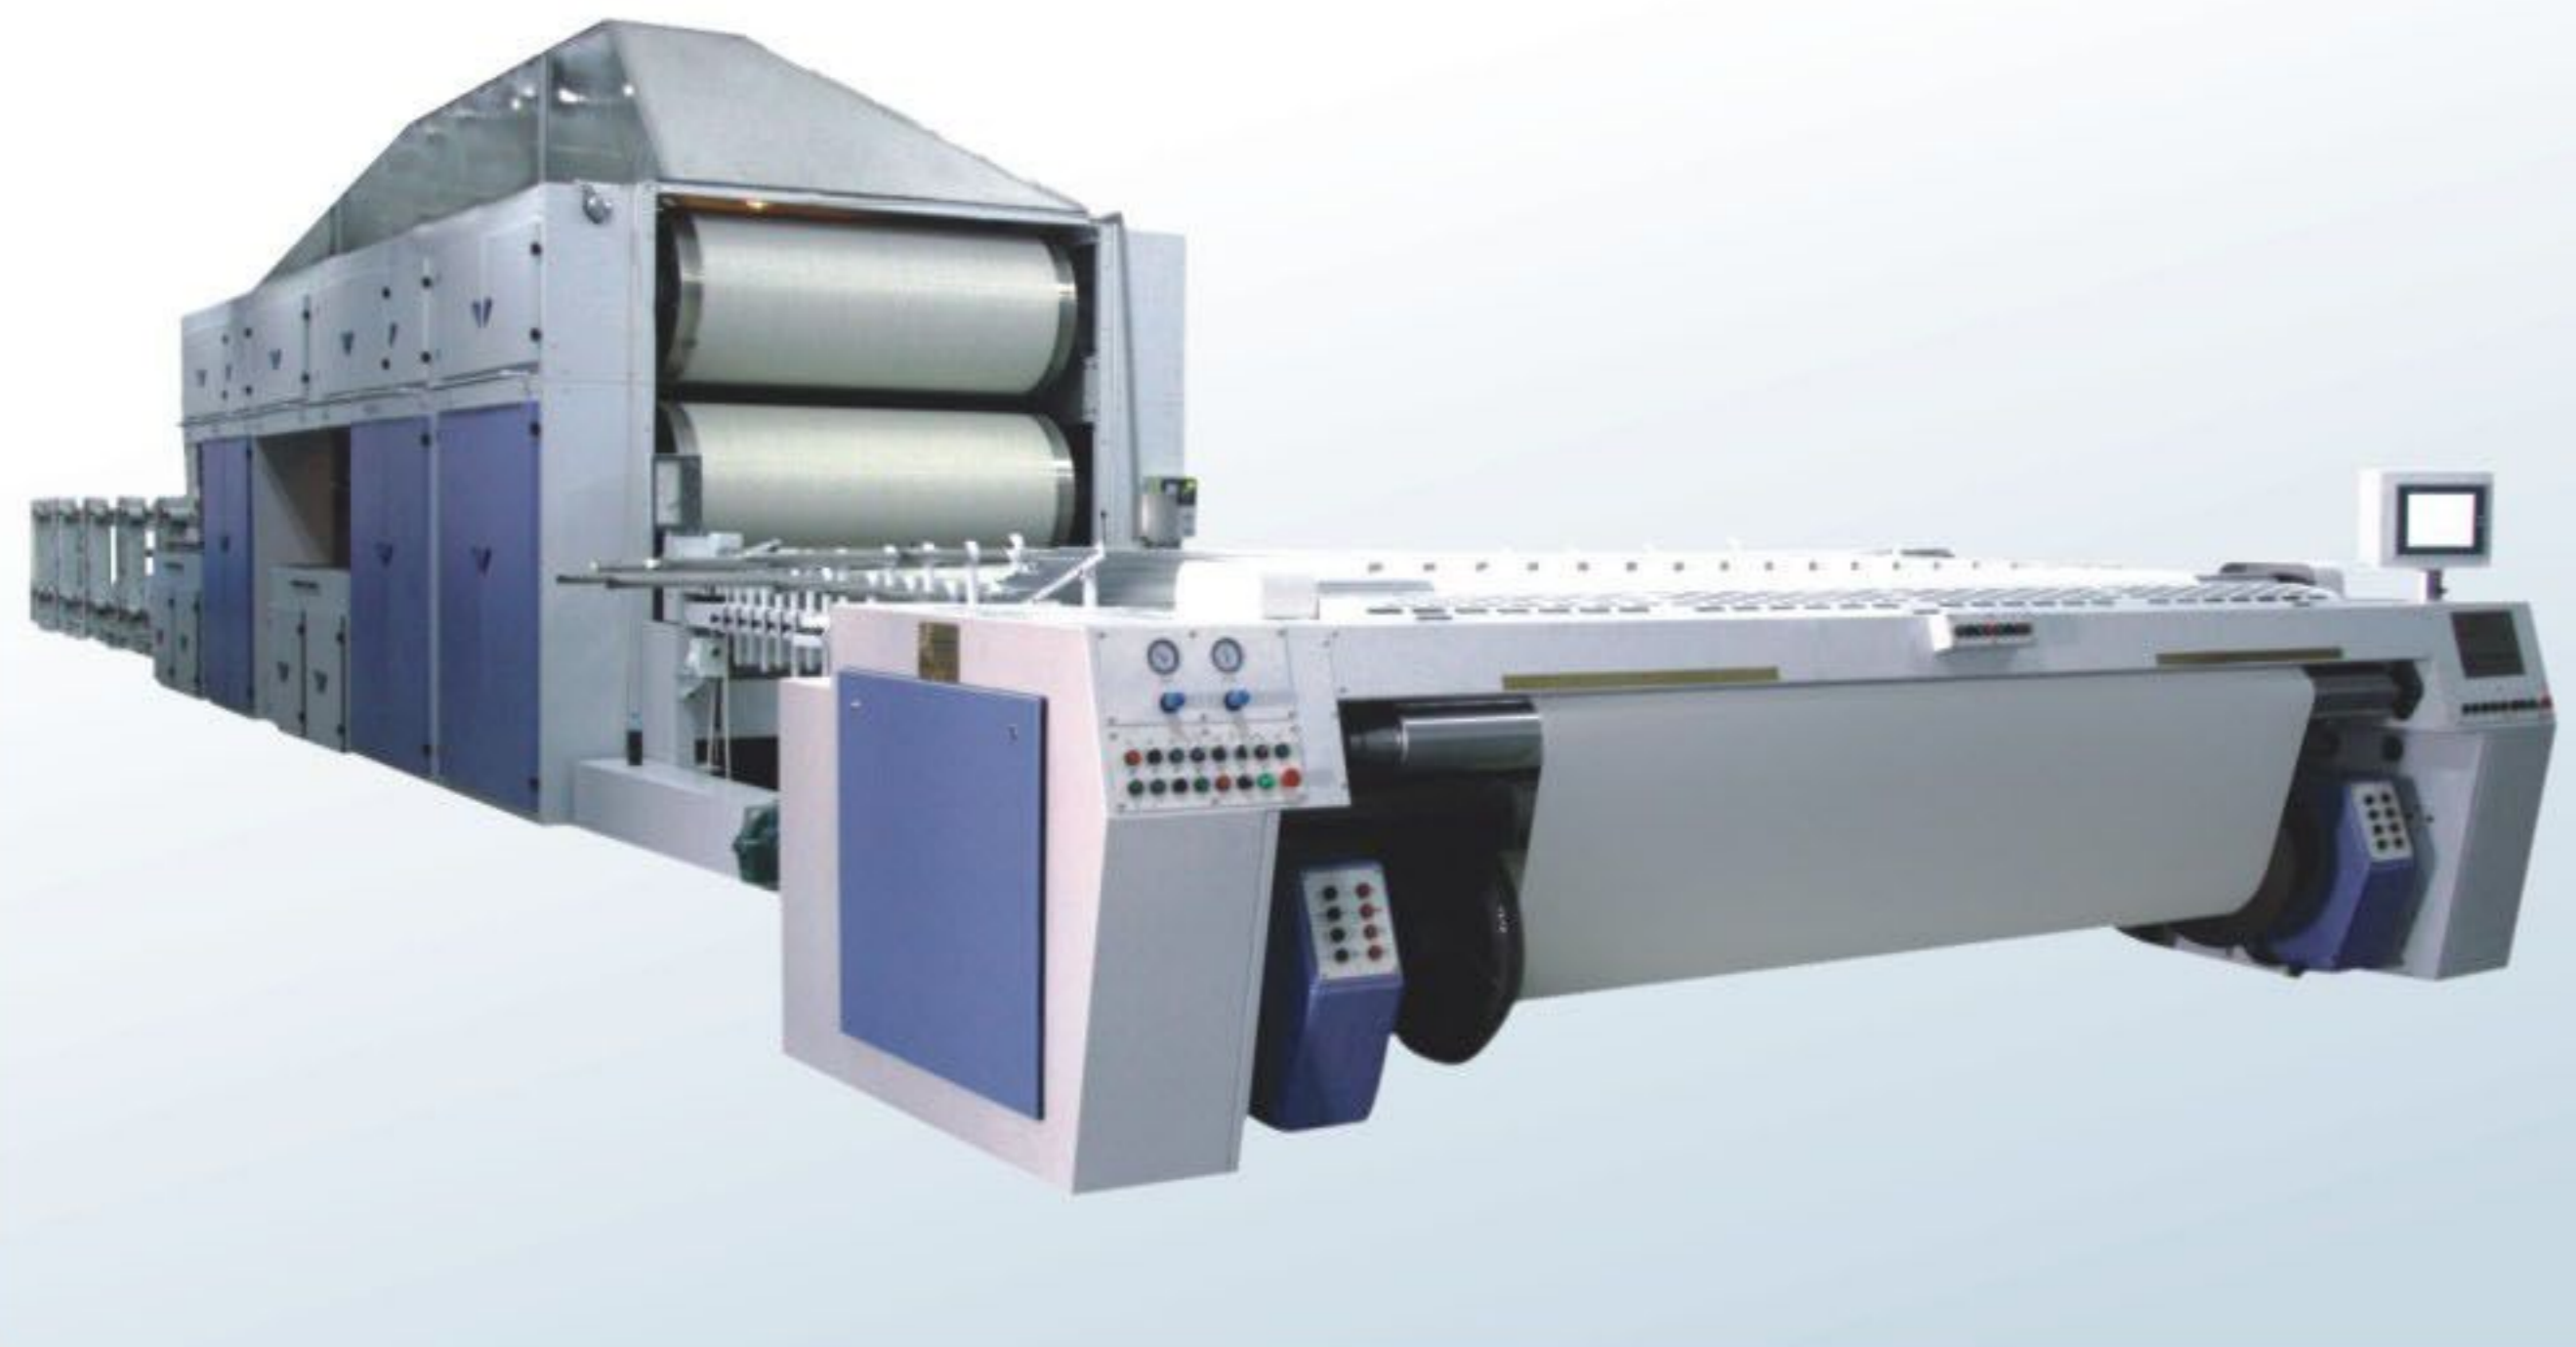


# G A306A型浆纱机

## GA306A Type Sizing Machine

### ◆ 流程图 Flow chart

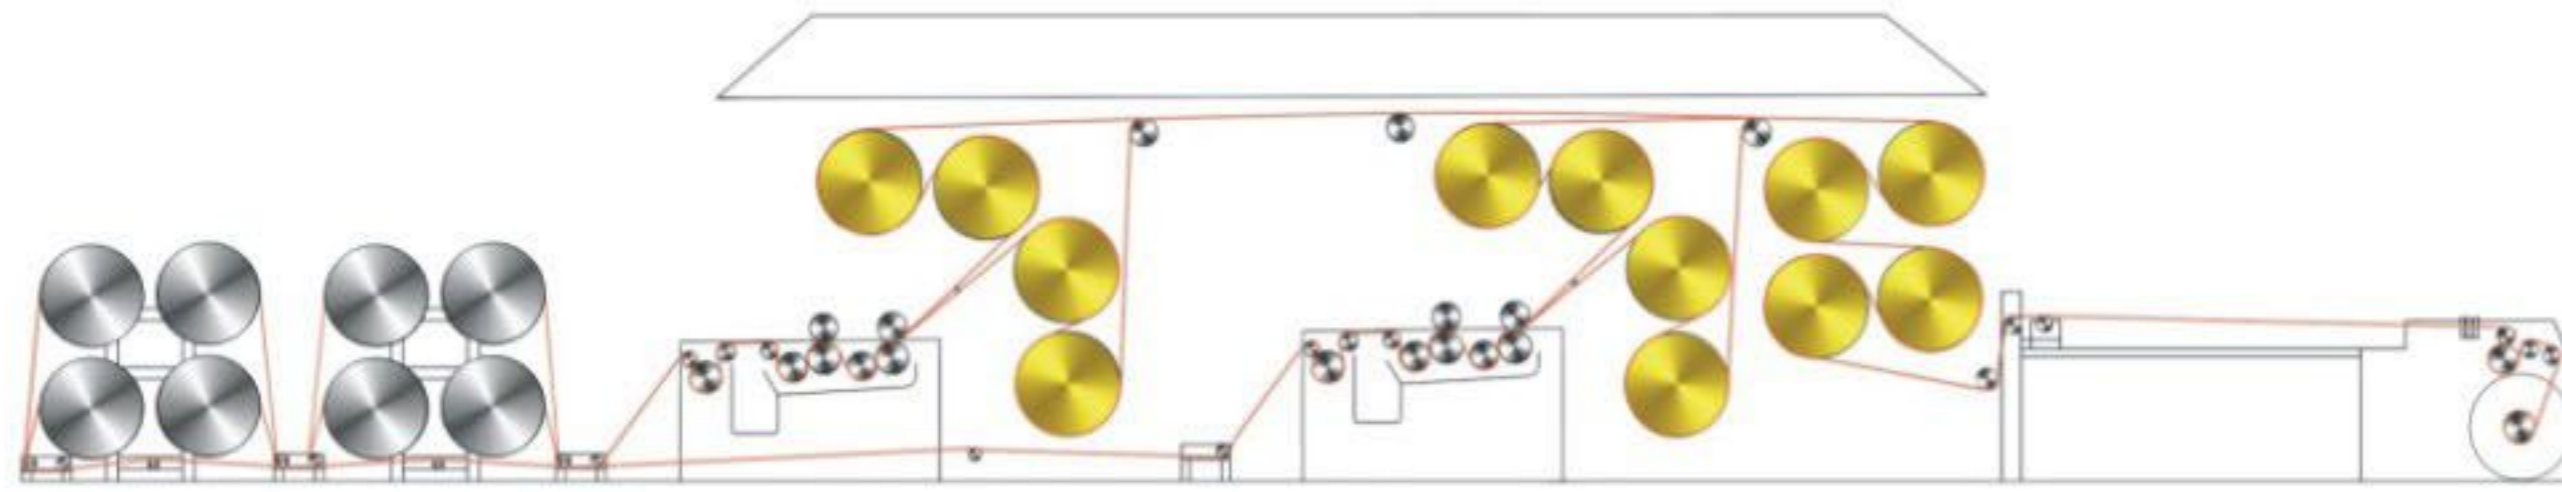

### ◆ 主要技术参数表 Main Specifications

项目(Item)	GA306-240	GA306-300	GA306-360
型式 Style	调幅车头、双浆槽、高架烘筒分层 With headstock adjustable width, double sizing box, drying cylinder split-sheet		
名义幅度 Nominal width	240	300	360
速度 Speed (m/min)	1-80 (落轴: 0.5) (doffing: 0.5)		
织轴卷绕直径 Diameter of beam winding(mm)	110-800/1000		
织轴最大轴管长度 Max.length of beam(mm)	2650	3250	3930
烘筒数量 Number of drying cylinder	12		
烘筒工作幅宽 Working width of drying cylinder(mm)	1800 or 2000		
浆槽工作幅宽 Working width of sizing box(mm)	1800 or 2000		
经轴数量 Number of warp beam(mm)	16	20	20
经轴最大直径 Max.diameter of warp beam(mm)	800/1000		
总功率 Total power(kw)	64 (平均实际消耗功率<20Kw/h) (averade actual power<20Kw/h)		
占地面积 Occupied area L x W x H(m)	26.1 x 4.45 x 4.2	28.3 x 5.05 x 4.2	29.36 x 5.73 x 4.2

### 『 技术描述 』 Technical Description

GA306A型浆纱机是郑州纺织机械股份有限公司根据市场需求、满足目前棉纺织行业对宽幅、细支、高密织物的纯棉、涤棉、化纤混纺短纤维等品种的上浆需要，满足用户对浆纱机高速、高效产品的上浆需要，与国内外各种有梭和无梭织机配套使用的高性能两单元控制浆纱机，以其可靠的性能、物超所值的优势为广大用户所青睐。

To meet the requirement of variety in textile industry on top grade and diversification, Zhengzhou Textile Machinery Co., Ltd., puts forward new type GA306A series sizing machine with two-unit drive. This machine can be matched various shuttle looms and shuttleless looms at home and abroad to completely meet your requirements depending on the excellent performance and careful/prompt services.